

FIG. 1

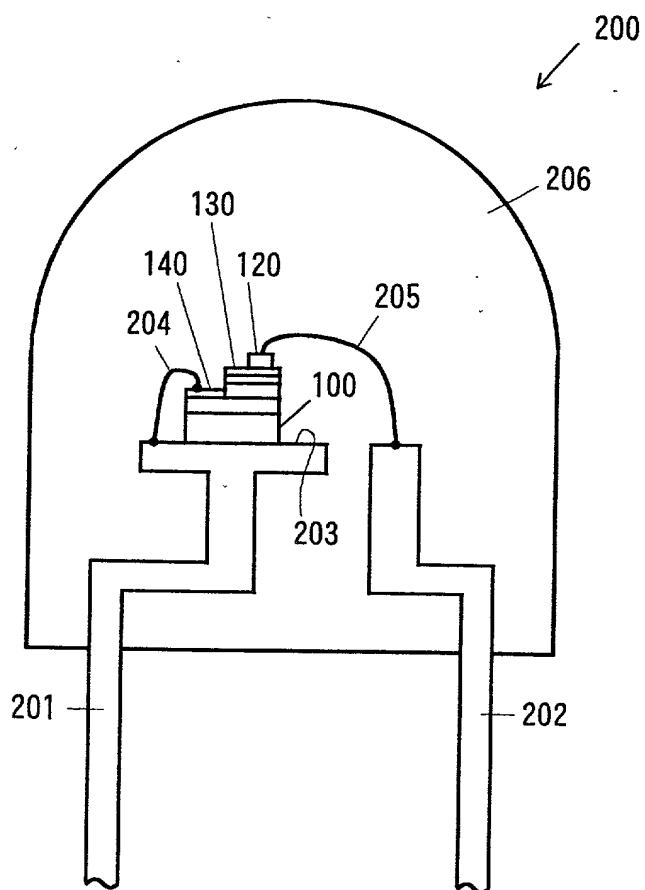


FIG. 2

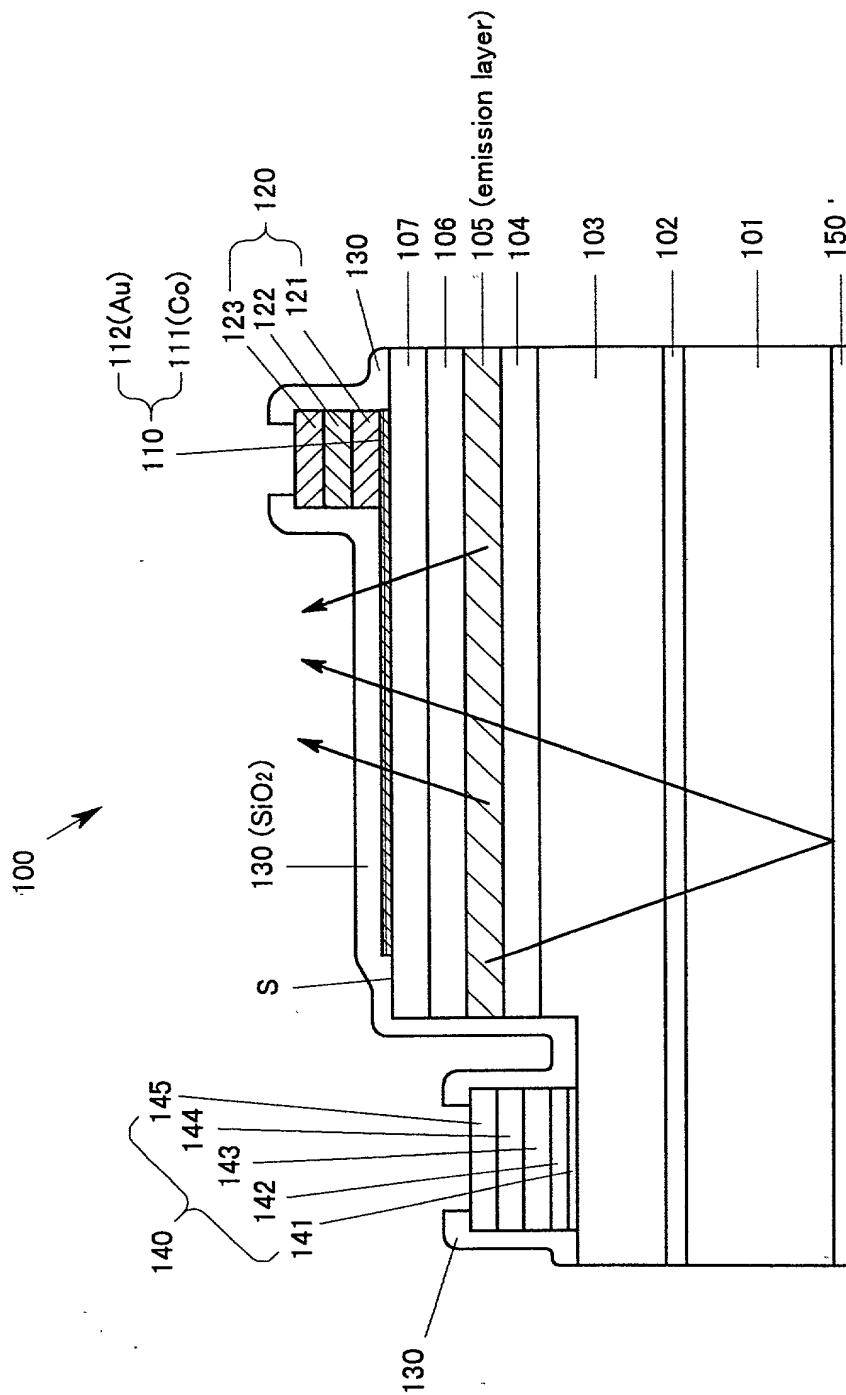


FIG. 4

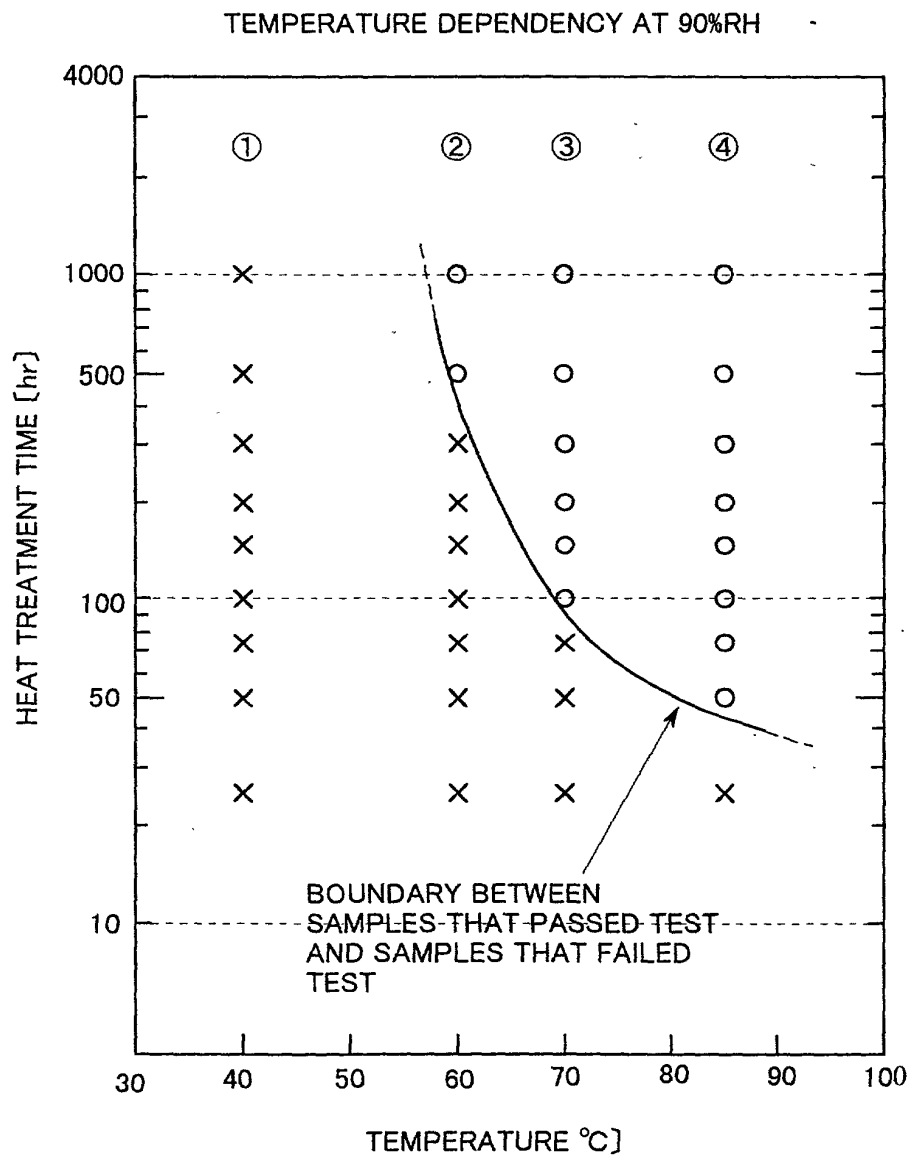


FIG. 5

HUMIDITY DEPENDENCY AT 85°C

| | | HEAT TREATMENT TIME (hr) | | | | |
|------|--------|--------------------------|----|----|-----|-----|
| | RH (%) | 25 | 50 | 75 | 100 | 125 |
| A | 30 | X | X | X | O | O |
| B | 50 | X | X | O | O | O |
| C(4) | 90 | X | O | O | O | O |

- ...LIGHT-EMITTING CHARACTERISTICS NOT CHANGED
- X ...LIGHT-EMITTING CHARACTERISTICS CHANGED

FIG. 6

